


PVS A-SL2M Series



Models:

PVS-A03K-SL2M-EU
PVS-A3.68K-SL2M-EU
PVS-A04K-SL2M-EU
PVS-A05K-SL2M-EU
PVS-A06K-SL2M-EU

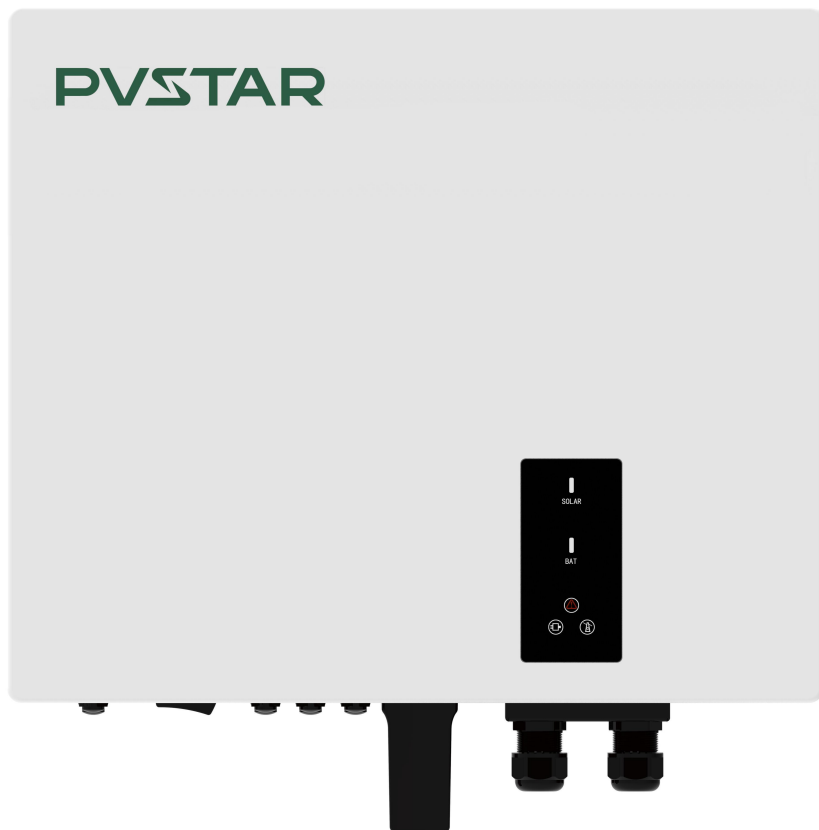

Easy-to-install

- Quick & easy-to-install with basic tools.
- Quick setup and commissioning with PVSTAR Apps.
- Compact wall mount design.



Reliable

- Smart energy management.
- UPS capability- power during blackouts.
- IP66 rated design for outdoor use.



User-friendly

- User friendly App interface.
- Online monitoring via Wi-Fi and PVSTAR Apps.
- Easy to connect -battery and smart meter interfaces.

Technical DataSheet

		PVS-A03K-SL2M-EU	PVS-A3.68K-SL2M-EU	PVS-A04K-SL2M-EU	PVS-A05K-SL2M-EU	PVS-A06K-SL2M-EU
PV Input	Max. PV array power	5500 Wp STC	6180 Wp STC	6500 Wp STC	7500 Wp STC	9000 Wp STC
	Max. input voltage	550 V				
	MPPT voltage range / Rated input voltage	40 V to 530 V / 380 V				
	Min. input voltage / Start-up voltage	40 V / 50 V				
	No. of independent MPPT trackers / Strings per MPPT input	2 / 1				
	Max. input current per MPPT	16 A				
	Max. short-circuit current per MPPT	20 A				
Battery input	Nominal battery voltage	48 V				
	Battery voltage range	40 V to 60 V				
	Max. charging / discharging power	5000 W / 5000 W				
	Max. charging current / Max. discharging current	100 A / 100 A				
	Battery type	Li-Ion				
	Compatible Battery	PVS A-L series				
AC output	AC voltage range / Nominal AC voltage	180 V to 280 V / 230 V				
	Rated AC grid frequency	50 Hz / 60 Hz				
	AC grid frequency range	50 Hz±5Hz / 60 Hz±5Hz				
	Rated active power	3000 W	3680 W	4000 W	5000 W*1	6000 W
	Rated apparent power	3000 VA	3680 VA	4000 VA	5000 VA*1	6000 VA
	Max. apparent power	3000 VA	3680 VA	4000 VA	5000 VA*1	6000 VA
	Rated grid output Current (@230V)	13.1 A	16 A	17.4 A	21.7 A*2	26.1 A
	Max. grid output current	13.6 A	16 A	18.2 A	22.7 A*2	27.3 A
	Harmonics THDi (@ Nominal power)	< 3%				
AC input	Rated grid voltage	a.c. 230V				
	Rated grid frequency	50Hz / 60Hz				
	Rated apparent power	6000 VA				
	Max. input apparent power from grid	6000 VA				
	Rated input current from grid	a.c. 26.1 A				
	Max. input current from grid	a.c. 27.3 A				
EPS output	Nominal output voltage	230 V				
	Nominal output frequency	50 Hz / 60 Hz				
	Rated apparent power	5000 VA				
	Max. output apparent power	5000 VA				
	Peak output apparent power	7500 VA, 10s				
	Rated Current (@230V)	21.7 A				
	Max. output current	21.7 A				
	Max. switch time	≤ 10 ms				
	Output THDi (@ Linear load)	< 3%				
Effi- ciency	MPPT efficiency	99.9%				
	Euro efficiency / Max. efficiency	97% / 97.6%				
	Max. battery to load efficiency	94.7%				
Safety protection	DC-side disconnection device	●				
	PV string- / Battery input reverse polarity protection	● / ●				
	All-pole sensitive residual current monitoring unit	●				
	Anti-islanding protection	●				
	Ground fault protection	●				
	AC output over current / Short circuit current protection	● / ●				
	AC over voltage protection	●				
	Protection class (as per IEC 62109-1) / overvoltage category (as per IEC 62109-1)	I / AC: III; DC: II				
General data	Power factor at rated power / adjustable displacement	≥0.99 / 0.8 leading to 0.8 lagging				
	Dimensions (W / H / D)	494mm / 420mm / 195 mm				
	Device weight	21.5 kg				
	Operating temperature range	-25 °C ... +60 °C				
	Noise emissions (typical)	30 dB(A)				
	Standby consumption	< 10 W				
	Cooling concept	Natural Convection				
	Degree of protection (as per IEC 60529)	IP66				
	Climatic category (according to IEC 60721-3-4)	4K4H				
	Max. permissible value for relative humidity (non-condensing)	100%				
	Max. operating altitude	4000m (>3000m power derating)				
	Country of Manufacture	THE PEOPLE'S REPUBLIC OF CHINA				
Features	User interface	LED & App				
	Communication with BMS	RS485 / CAN				
	Communication with meter	RS485				
	Communication with portal	WIFI Stick				
	Other communication	DRM				
	Integrated power control / Zero export control	● / ●				

● Standard features / ○ Optional features / – not available

*1 For VDE-AR-N4105, Smax=S_n=4600VA, P_n=4600W

*2 For AS/NZS4777.2, I_{ac} max=21.7

Version: June 2022

